


Speedgate DTS110 with tempered glass wings for single or bidirectional access control.

Suitable for different market segments such as commercial and administration sites, banks, insurances, sport facilities, museums etc. High security, modern and innovative design to suit even most prestigious requirements.

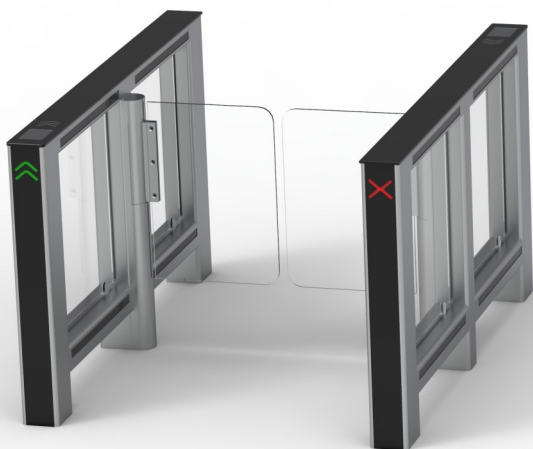

Technical specifications




Model:	DTS 110
Dimensions:	1500 x 980 x 130 mm
Cabinet material:	stainless steel 1,5mm
Wings:	plexiglass or tempered glass
Open/close time:	0,6-1,2 sec.
Number of sensors:	8
Lane width:	600 mm - 1000 mm
Operating voltage:	24 V DC
Power:	230 V AC, 50Hz, 30 W
Working environment	Indoor/outdoor
Weight:	80/100 kg
Flow rate:	40-50 / min

- 1 pass with two single-sided modules
- 2 passages with two single-sided modules and one central module

Description

- Stainless brushed steel 1,5 mm thickness and 10 mm tempered glass wings.
- Top cover of black tempered glass.
- 8 optical sensors for detection and security.
- DC motor with gear box and electromagnetic brake
- Controller providing progressive acceleration and deceleration ensuring smooth movement of the wings.
- Adjustable direction of passage.
- Both sides LED indicators.
- Automatic opening in case of emergency.
- One side and central modules available.
- Easy integration of access control readers under the top glass.

Dimensions:

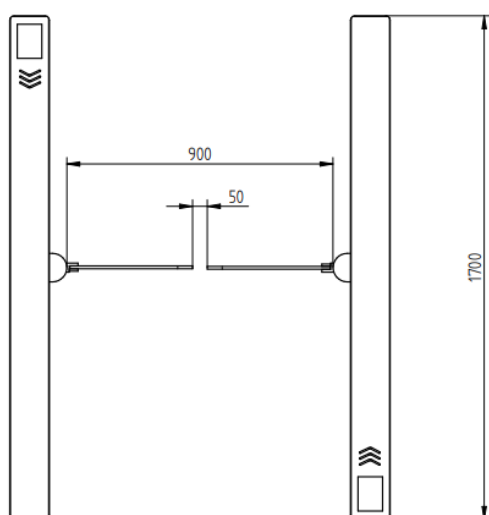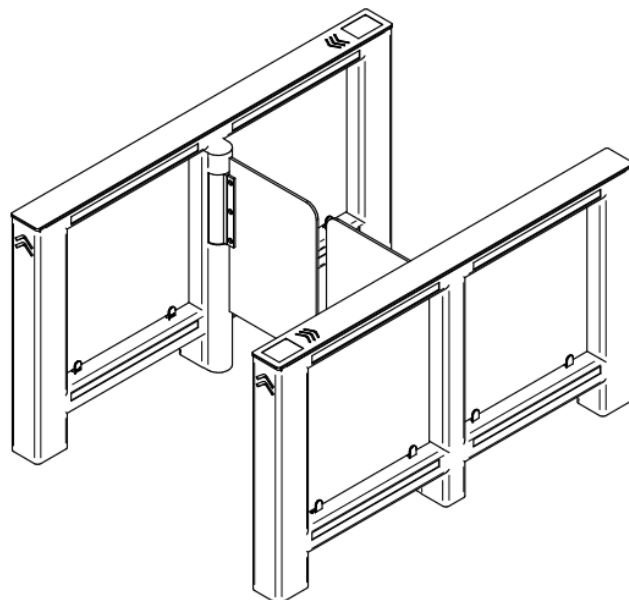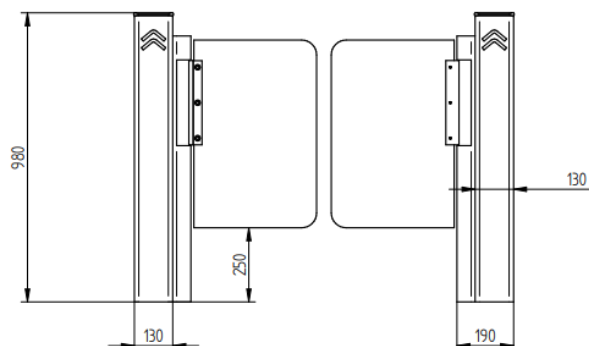

ASParking
ACCESS CONTROL

závory a turnikety
parkovací systémy
vstupenkové systémy
www.asparking.cz

AS Parking s.r.o.
Masarykova 118
CZ - 664 42 Modřice

asparking@asparking.cz
T: +420 515 536 385
F: +420 515 536 391

IČ: 25532961, DIČ: CZ25532961
Bankovní spojení: Název banky
č. ú.: 1234567/0100

Parameters and design subject to change without prior notice