




## Description

- Stainless brushed steel 1,5 mm thickness and tempered glass wings.
- Optical sensors for detection and security
- Innovative safety solution with reliable locking in extreme positions and safety anti-collision clutch
- Lockable side covers allow easy access to the drive and control unit.
- Output for the superior system confirming the passage of the person
- LED guidance pictograms
- Possibility of integrating readers into the turnstile cabinet.
- Advanced control unit with the possibility of customization and having a memory for 10 consecutive passes ensuring smooth operation

## Technická specifikace

	DNG492	DNG497
Power:	230 VAC/50 Hz	
Cabinet material:	nerez, křídla sklo/polykarbonát	
Barrier height:	1200 mm	1700 mm
Number of sensors:	7-11	
Lane width:	900	
Power supply:	24 VDC	
Hmotnost:	96 kg	
Kapacita:	40 osob/min.	
Rychlosť otevrení/zavretí:	0,8 - 1,2 sec.	
Rozmery:	1400 x 500 x 1020 mm	

## Dimensions:

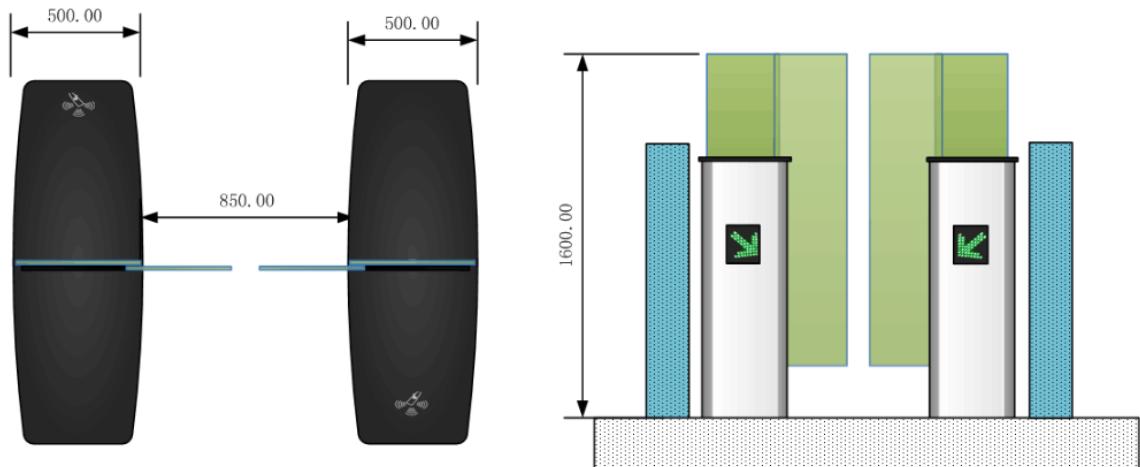

Parameters and design subject to change without prior notice