



Barrier gate for control acces at places with wide lanes for example: industrial areas, traffic management etc.,


## Specification:

<b>MODEL:</b>	<b>RB70</b>
<b>Arm length:</b>	up to 12 m
<b>Running speed:</b>	6-10 sec.
<b>Power:</b>	880 W
<b>Supply voltage:</b>	230 V/50 Hz
<b>Weight:</b>	420 kg
<b>Operating temperatures:</b>	-20°C - +50°C
<b>MCBF:</b>	3.000.000 cycles
<b>Protection:</b>	IP54
<b>Dimensions:</b>	470 x 470 x 1250 mm

## Description:

- Round aluminium central arm from 9 to 12 m, white with red reflecting stripes and with galvanised steel cables.
- Removable top cover and door
- Exceptional strong electromechanical assembly of 3 phase asynchronons gear motor and secondary transmission on gear wheel.
- Frequency inverter ensuring fluent acceleration and deceleration without vibration.
- Spring balancing
- Emergency release with manual hand wheel.
- Integrated control unit.
- Boom up to 12 m.

## Dimensions:

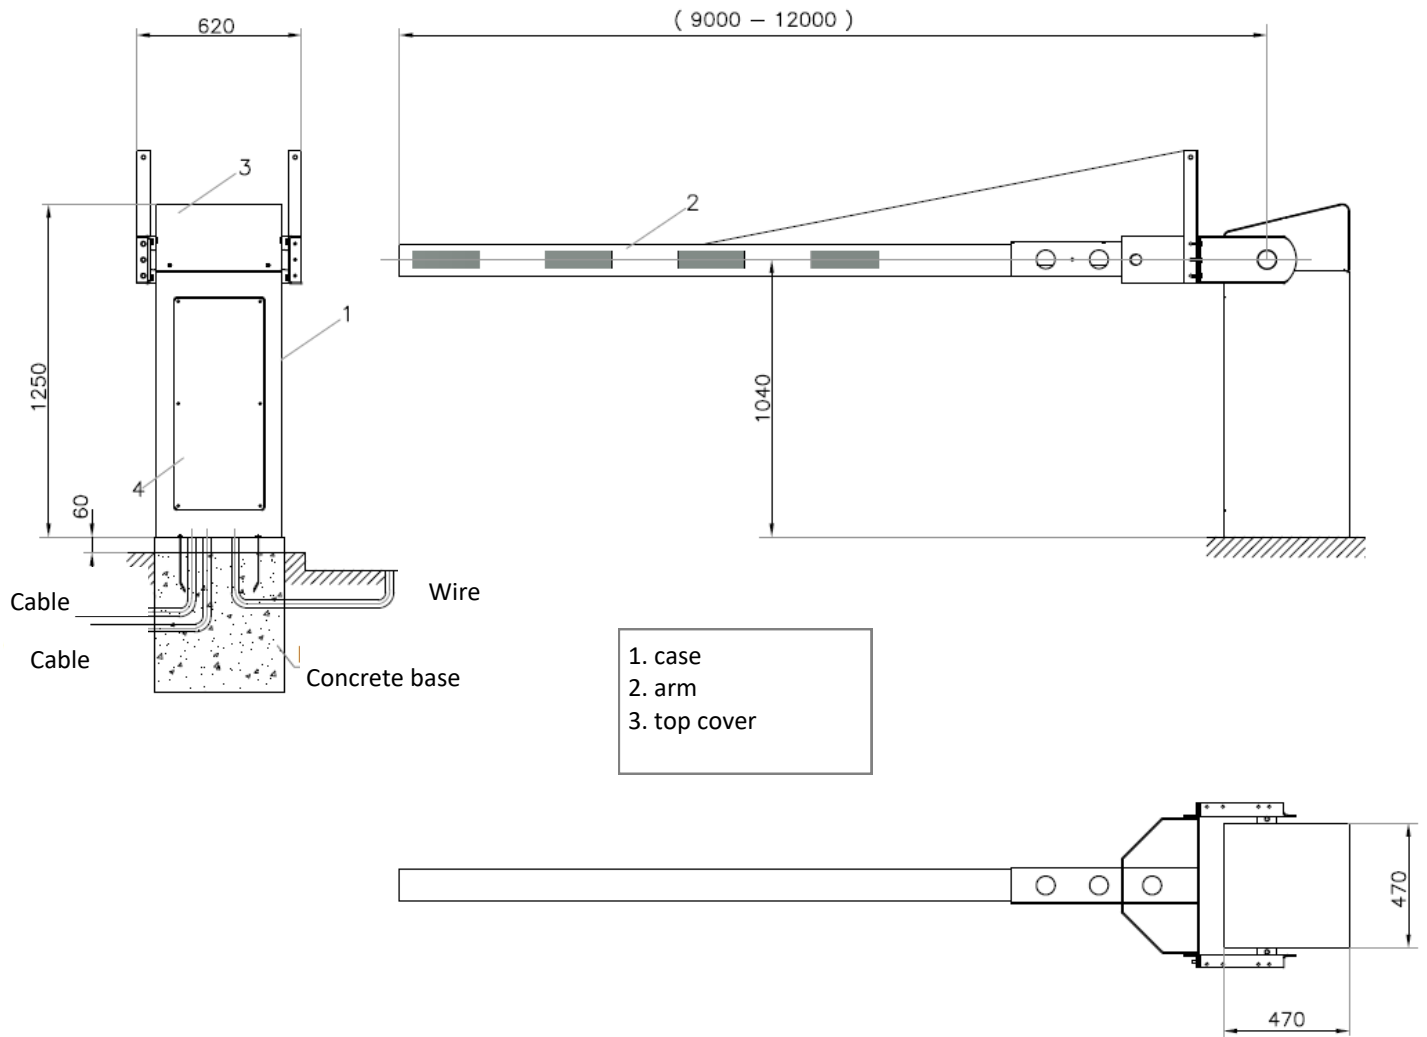

**ASParking**  
ACCESS CONTROL

závory a turnikety  
parkovací systémy  
vstupenkové systémy  
**www.asparking.cz**

AS Parking s.r.o.  
Masarykova 118  
CZ - 664 42 Modřice

asparking@asparking.cz  
T: +420 515 536 385  
F: +420 515 536 391

IČ: 25532961, DIČ: CZ25532961  
Bankovní spojení: Název banky  
č. ú.: 1234567/0100

With a constant view of adopting the latest technological development AS Parking reserves the right to amend the information above, and any time.